




Commercial air condition systems

Window air-conditioners

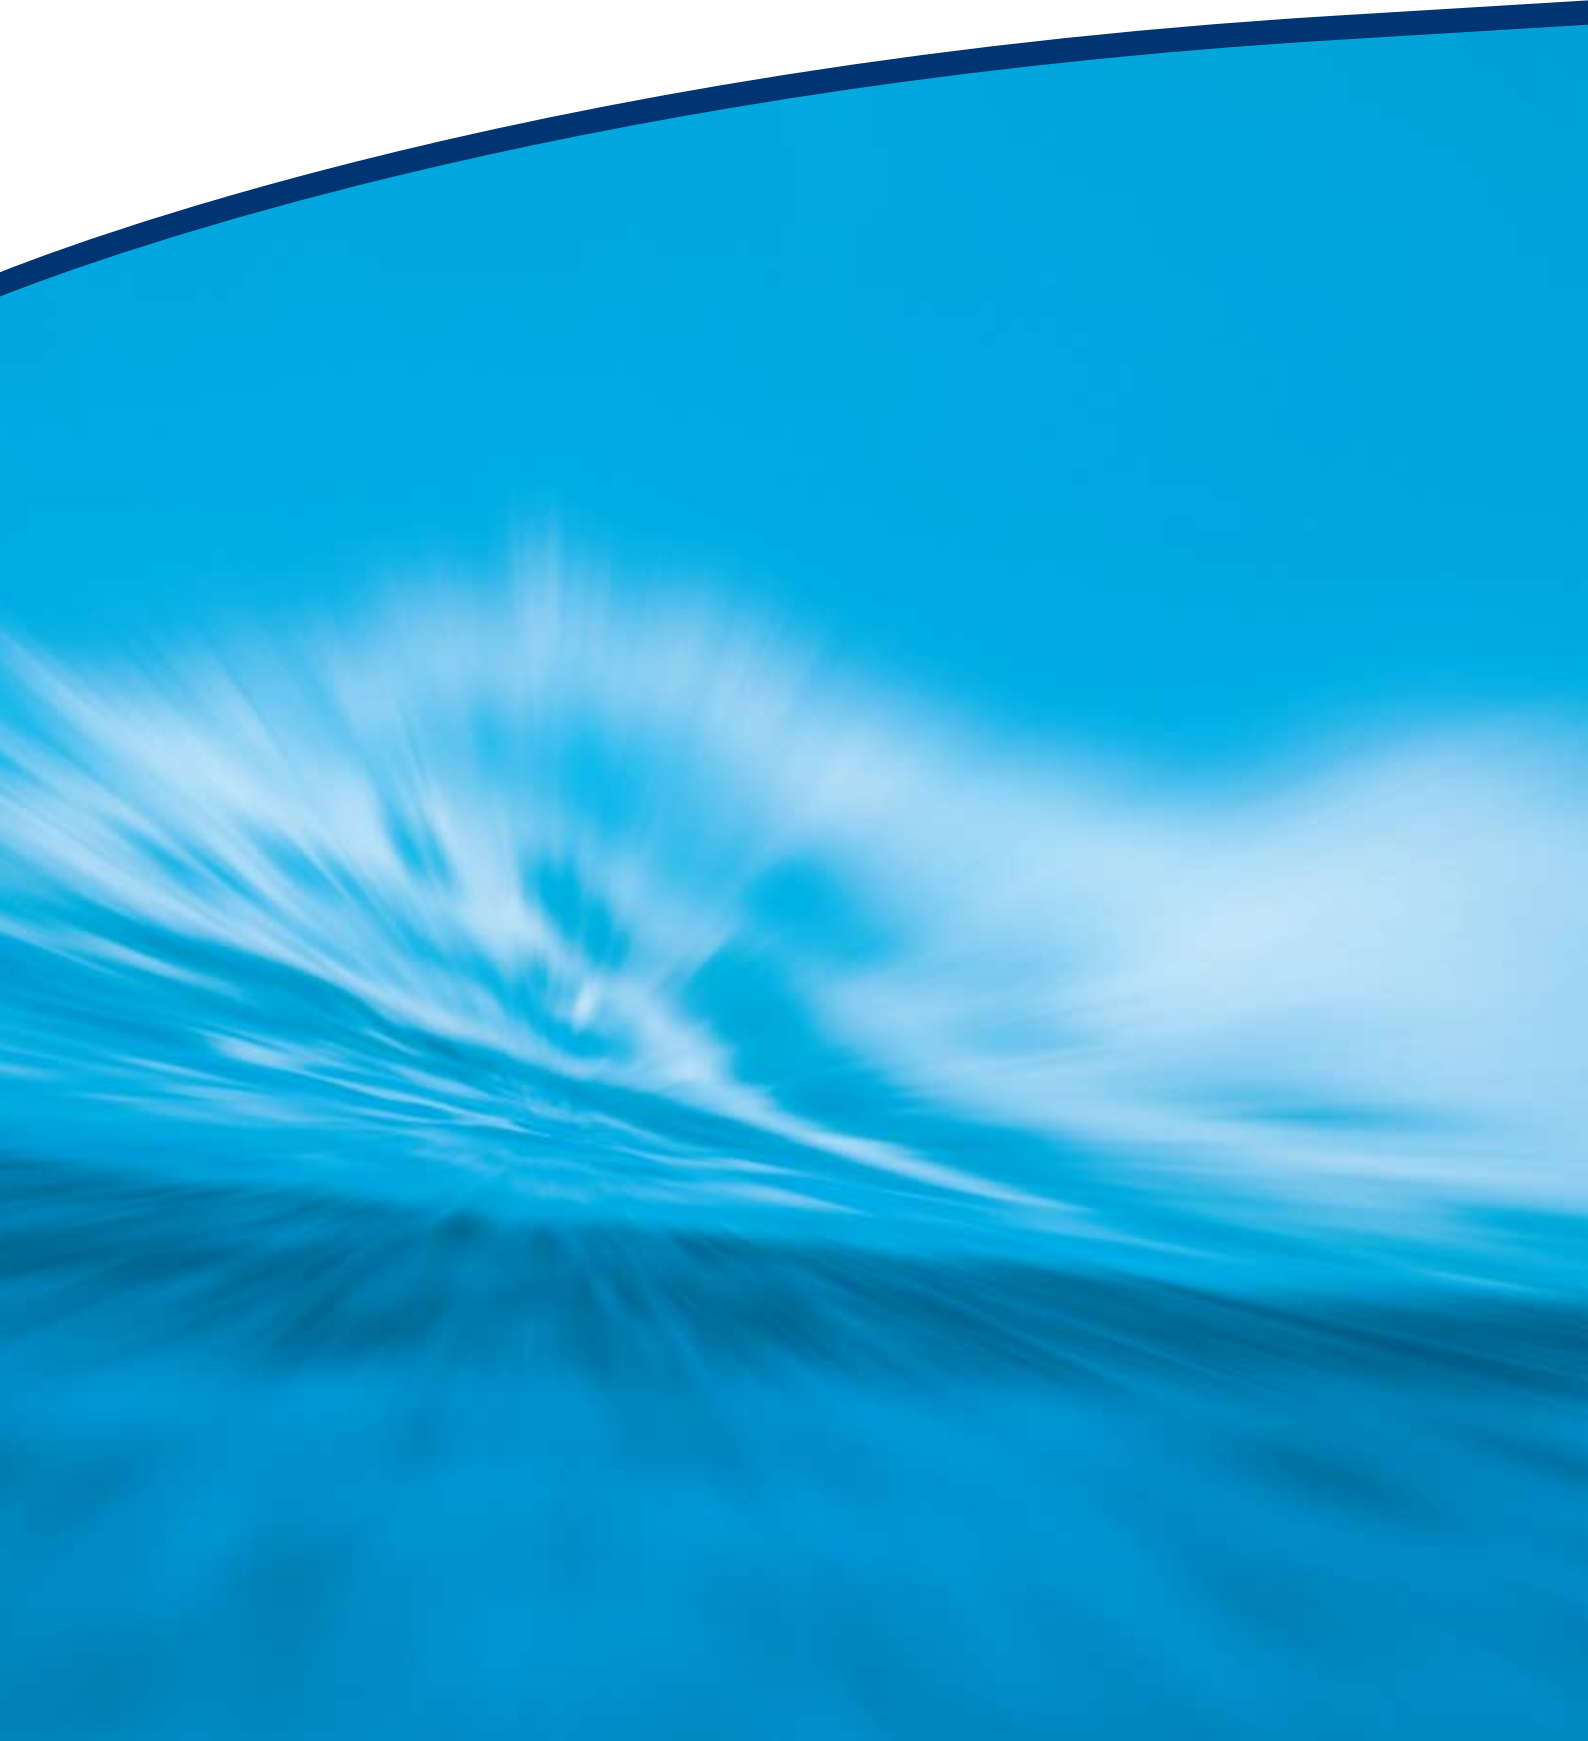

Window air-conditioners

All in one – combination of indoor and outdoor units

- Silent operation
- Advances filtration system
- “Auto restart” function
- “Timer” function
- “Sleep” function
- “Fresh air” function



One device – two installation options

The special shape of Coolwex floor/ceiling air-conditioners provides the option of two methods of installations. The indoor unit can be used as a floor-standing unit. It can be installed as a radiator or mounted on the ceiling. Thus, the same device enables both types of installation as well as the complete adjustment to the room and requirements.

Easy installation and control of Coolwex window air-conditioners

The combination of indoor and outdoor units into a single unit ensures the most comfortable living environment. Installation into the previously prepared window or wall opening is exceptionally easy. Controls on the air-conditioner itself are simple to use as well.

Exceptionally silent and long-lasting operation

Installation of two separate ventilator motors for the evaporator and the condenser together with the exceptionally efficient rotation compressor ensures an exceptionally silent operation and long lifespan of the device. The Coolwex window air-conditioners also provide the possibility of fresh air intake by opening a special flap.

Model			CO 9 R 7	CO 12 R 7	CO 18 R 7
Cooling capacity		W	2635	3515	5270
Cooling Input Power		W	1110	1420	1970
Rated current		A	4,9	6,3	9,4
Heating capacity		W	2635	3515	5270
Heating Input Power		W	1110	1420	1970
Rated current		A	4,9	6,3	9,4
Air flow volume	min	m ³ /h	330	450	560
	med	m ³ /h	380	500	610
	max	m ³ /h	420	550	660
Noise level - Outdoor		dB(A)	35-42	35-42	37-43
Power supply		V/Ph/Hz	230/1/50	230/1/50	230/1/50
Max. current		A	16	16	20
Net dimension	(W/H/D)	mm	350/450/540	400/560/650	435/660/640
Weight		kg	35	51	55



Coolwex group USA

www.coolwex.com



9199

Dealer: